


CLD340

High Temperature AlGaAs Photodiode



January, 2002

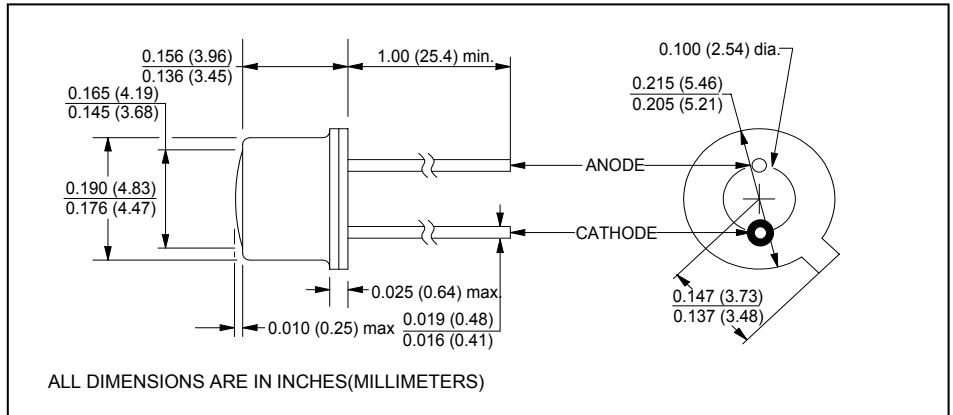

features

- usable at 225°C
- 880nm wavelength
- narrow response range
- hermetically sealed TO-46

package

- ±35° acceptance angle

description

The CLD340 is a high temperature AlGaAs photodiode designed for sensitivity from 830 to 910nm. This specialty detector eliminates the need for signal modulation or filtering of ambient light when used where background illumination could cause problems. The 0.040" by 0.040" chip is mounted in a flat window TO-46 package. The CLE335 is recommended for optical coupling.

absolute maximum ratings (T_A = 25°C unless otherwise stated)


storage temperature	-65°C to +250°C
operating temperature	-65°C to +225°C
lead soldering temperature ⁽¹⁾	260°C
reverse voltage	10V
continuous power dissipation ⁽²⁾	250mW

notes:


1. 0.06" (1.5mm) from the header for 5 seconds maximum.
2. Derate linearly 1.0mW/°C from 25°C free air temperature to T_A = +225°C.

fundamental characteristics


spectral response

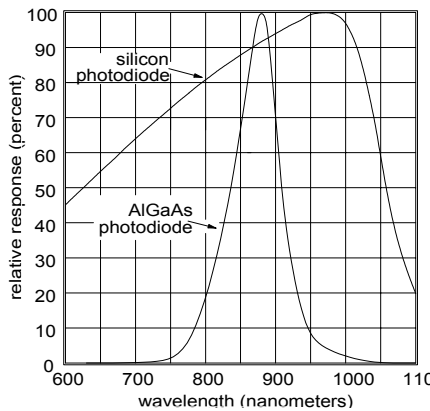

light current vs temp.

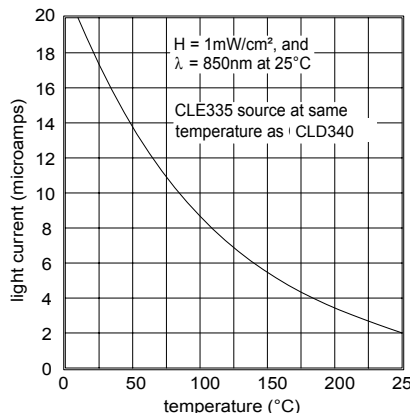

dark current vs temp.

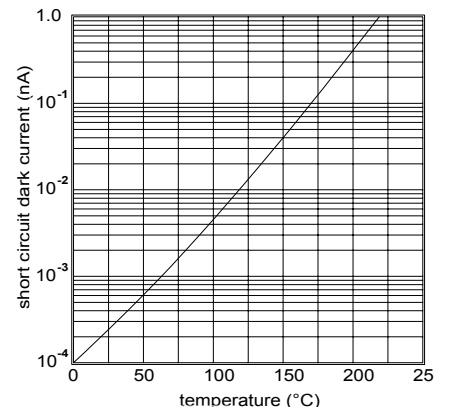

Clairex reserves the right to make changes at any time to improve design and to provide the best possible product.

Revised 3/6/06

Clairex Technologies, Inc.
Phone: 972-265-4900

1301 East Plano Parkway
Fax: 972-265-4949

Plano, Texas 75074-8524
www.clairex.com

CLD340

High Temperature AlGaAs Photodiode



electrical characteristics at $T_A = 25^\circ\text{C}$ (unless otherwise noted)						
symbol	parameter	min	typ	max	units	test conditions
I_{SC}	Short-circuit current ⁽³⁾	2.0	3.5	-	μA	$V_{BIAS} = 0\text{V}$, $E_e = 1\text{mW}/\text{cm}^2$
I_D	Dark current	-	0.1	1.0	nA	$V_R = 5\text{V}$, $E_e = 0$
R_S	Shunt resistance	-	3000	-	Meg. Ω	$V_R = 10\text{mV}$
V_{BR}	Reverse breakdown	20	-	-	V	$I_R = 10\mu\text{A}$
C_j	Junction capacitance	-	170	-	pF	$V_{BIAS} = 0$, $f = 1\text{MHz}$
Θ_{HP}	Total angle at half sensitivity points	-	70	-	deg.	
t_r, t_f	Output rise and fall time ⁽³⁾	-	1.0	-	μs	$R_L = 50\Omega$, $V_R = 5\text{V}$

note: 3. Radiation source is an aluminum gallium arsenide IRED with a peak emission wavelength of 850nm.

Clairex reserves the right to make changes at any time to improve design and to provide the best possible product.